

LS-208

QUICK START GUIDE

EXTEND YOUR WARRANTY FREE!


Your new LS-208 comes with a 1 year warranty. Want to double it? Register your new microphone within 30 days of purchase at: LautenAudio.com/Register


CAPSULE & REJECTION


Internally shock mounted 32mm capsule with exceptional off-axis rejection.

NOTE: A windscreen or pop filter *MUST* be used for vocal recording.

LOW-FREQUENCY SOUND SHAPING

 The flat setting captures the full low-frequency extension of a sound.


 The 50Hz setting naturally reduces low-end and boominess.

 The 120Hz setting increases clarity and perceived high frequencies.

+48V

PHANTOM POWER

Your new LS-208 requires 48 Volts of Phantom Power to work.

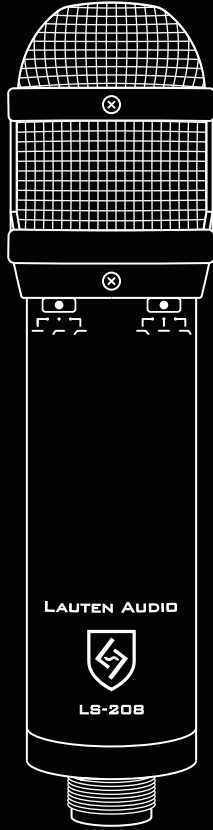

SPL & DYNAMIC RANGE


Your LS-208 effortlessly withstands up to 135dB of SPL without a pad and provides 135dB or more of dynamic range.

HIGH-FREQUENCY SOUND SHAPING

The flat setting is clean and articulate with a modern edge.

The 10kHz setting is smooth and classy with a vintage feel.

The 8kHz setting is warm and cozy, similar to classic broadcast mics.



CARDIOID

LS-208 APPLICATIONS



VOCALS
HP 50Hz / LP Flat



BROADCAST
HP 50Hz / LP 8kHz



ELECTRIC GUITAR
HP 50Hz / LP 10kHz



BRASS
HP 50Hz / LP Flat